



Nokia Classic 2600c-2b Battery Replacement

Replacing the battery

Written By: Ian VanZandt







TOOLS:

- [iFixit Opening Tools](#) (1)
-

Step 1 — Battery

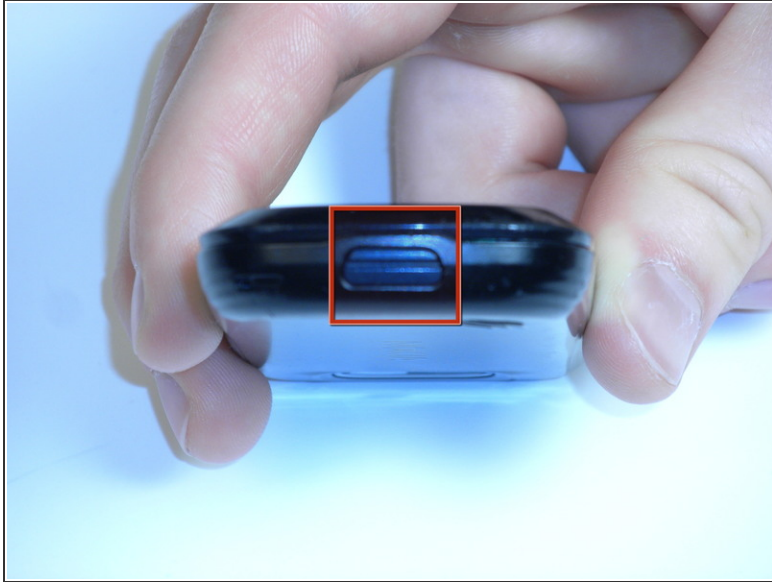

- Press down on the button located at the bottom of the phone, using the center ridge as a guide.
- Pull the phone apart from the bottom, keeping the button pressed down.

 **CAUTION!** The plastic opening tool may be used to gain leverage. Some force is required to open.

Step 2



- Remove the back cover to expose the battery.

Step 3



- Place a finger or plastic opening tool in the gap between the battery and the phone.
- Gently lift the battery out.
- Follow the instructions in reverse order to reassemble the phone.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 12:47:31 PM.